

REGIONAL TRANSPORTATION COMMISSION

Metropolitan Planning • Public Transportation & Operations • Engineering & Construction

Metropolitan Planning Organization of Washoe County, Nevada

SKY VISTA PARKWAY REHABILITATION AND WIDENING PROJECT January 4, 2022







MISSION Building a Better Community Through Quality Transportation







Sky Vista Parkway – Vista Knoll Parkway to Silver Lake Road



The project aims to achieve **safety and mobility improvements** for all modes of transportation.

- Improve vehicle congestion
 - Improve safety for both drivers and pedestrians
 - ADA improvements
- Provide a safe riding zone for bicyclists
- Improve roadway drainage



- Widen roadway from one lane each direction to two lanes
- New raised median
- Dedicated turn lanes
- New multiuse path on both sides of the road
- Drainage improvements
- Corridor lighting
- New roundabout at Silver Lake Road






- Final Design: Winter 2022
- Right-of-Way: Winter 2022
- Bid: April 2022
- Construction: Summer 2022 Summer 2023
- Duration: 12 Months



New roundabout at Silver Lake Road and Sky Vista Parkway

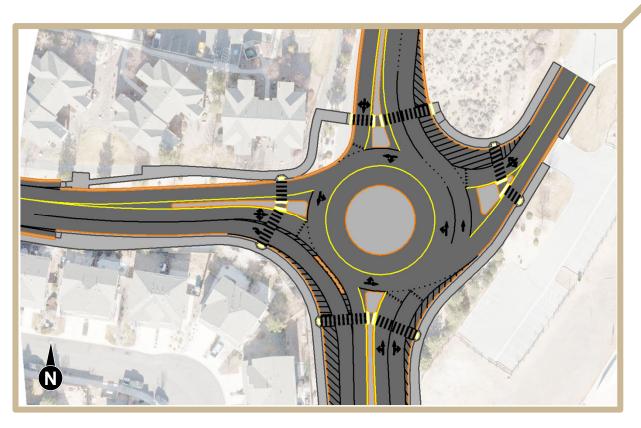








- Relocation of the existing overhead sign
- Tree survey and 1:1 caliper ratio replacement of trees greater than six (6) inches
- Site inventory of all ground materials and existing irrigation affected by the work
- Removal and replacement of irrigation system affected by the work
- Coordination with Washoe County Parks prior to construction



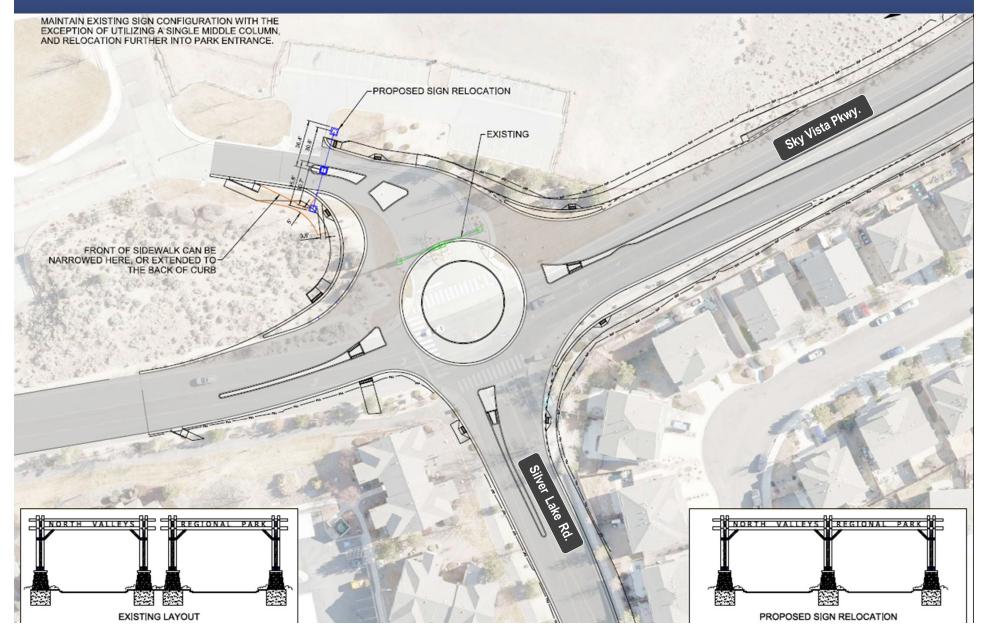












- Plant Schedule (trees)
 - Ponderosa Pine
 - Scotch Pine
 - Burr Oak
 - Austrian Black Pine
 - Shademaster Honey Locust
 - Golden Rain Tree
 - Aristocrat Callery Pear

- Ground Cover (shrubs)
 - Warminster Broom
 - Coronation Gold
 - Feather Reed Grass
 - New Mexico Privet
 - Powis Castle Artemisia

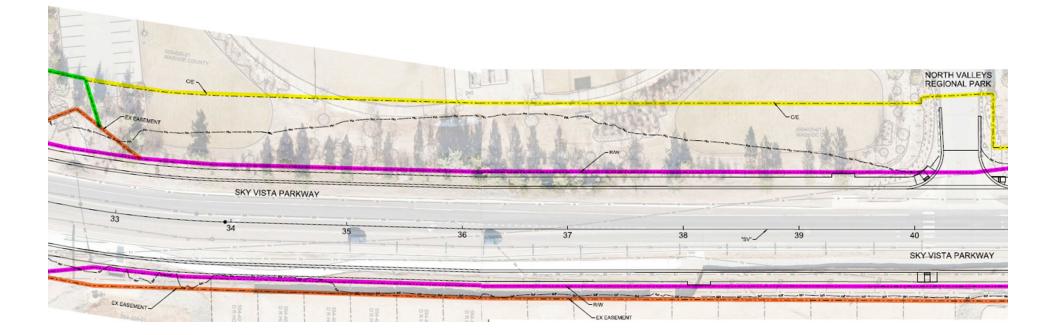





- \$17+ million investment in the community
- \$300,000 of direct park improvements
- 1.3 miles of roadway improvements
- 2.6 miles of sidewalk improvements
- 120 Total Trees Planted
- 14 City of Reno Banner Poles
- 6 existing Bus Stop improvements



Roy Flores, P.E., M.P.A. Project Manager

Regional Transportation Commission of Washoe County

rflores@rtcwashoe.com (775) 335-1881

Building A Better Community Through Quality Transportation rtcwashoe.com

