


**TYP. PATCH
RIGID PAVEMENT**
N.T.S.

SAW-CUTS SHALL BE A MINIMUM OF 9" OUTSIDE THE LIMITS OF THE TRENCH WALLS. DAMAGED, CRACKED OR UNDERMINED CONCRETE PAVEMENT (TYP) MAY REQUIRE WIDER PATCH SECTIONS AS MARKED BY COUNTY ENGINEER OR THEIR REPRESENTATIVE

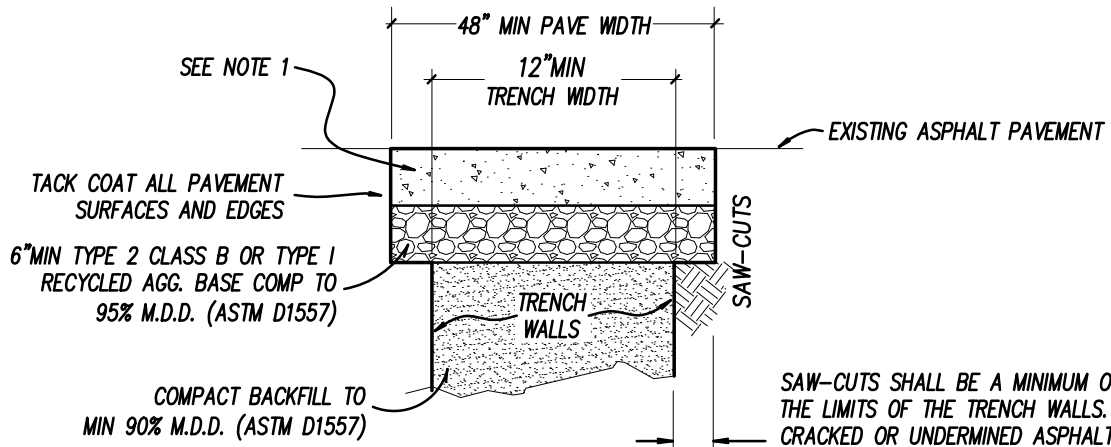

**TYP. PATCH
FLEXIBLE PAVEMENT**
N.T.S.

SAW-CUTS SHALL BE A MINIMUM OF 9" OUTSIDE THE LIMITS OF THE TRENCH WALLS. DAMAGED, CRACKED OR UNDERMINED ASPHALT PAVEMENT (TYP) MAY REQUIRE WIDER PATCH SECTIONS AS MARKED BY COUNTY ENGINEER OR THEIR REPRESENTATIVE

SEE PAGE 2 OF 2 FOR NOTES

NO.	REVISED	DATE	STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION	SECTION:	
1	Notes	12/05SW	PERMANENT PAVEMENT PATCH PAGE 1 OF 2	WASHOE	
2	Conc Note	12/11SW		DRAWING NO:	W-2.2
3	Notes	1/15 ME		DATE: 4/94 vp	PAGE:
4	Notes	2/17 BD			